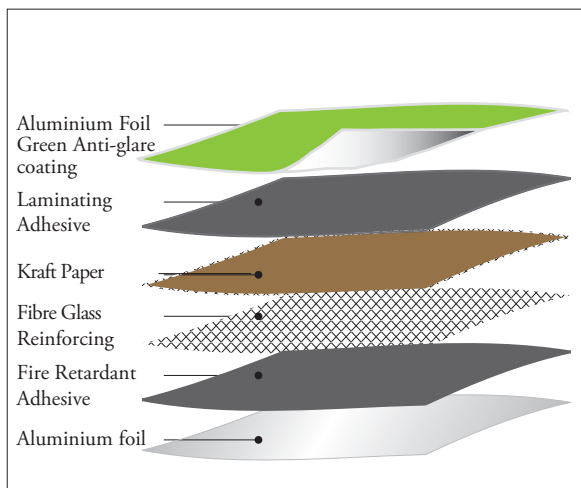


# ENVIROSEAL™ ROOF METAL/ WALL



## General Description

Bradford Enviroseal™ Roof Metal/Wall is a light duty sarking specifically designed for under metal residential and commercial roofs.

## Product Description

Bradford Enviroseal Roof Metal/Wall is a light duty radiant barrier consisting of a layer of fibreglass reinforced in a tri-directional pattern, kraft paper and two layers of aluminium foil laminate with fire retardant adhesive. To eliminate glare during installation, Enviroseal Roof Metal has a green antiglare coating with black Enviroseal logo on one surface.

## Applications

Bradford Enviroseal Roof Metal/Wall is a light duty economical grade reflective foil insulation specifically developed as insulation and condensation control for use under metal deck roofs in domestic and commercial applications. Enviroseal Roof Metal/Wall can also be used as a cost effective wall wrap to protect against dirt, dust, draughts and condensation. Enviroseal's integral thermal insulation properties also contribute to keeping homes warmer in winter and cooler in summer. Additionally, the installation of Enviroseal Roof Metal/Wall will add to the overall thermal performance of the roof or wall when a clear airspace of at least 20mm or more is provided at the reflective side of the foil face. Tough enough to withstand

the rigours of construction, Enviroseal provides an excellent barrier against dust during home building. Reducing glare from the external face of a building is an important site construction and road safety requirement. Enviroseal Roof Metal/Wall has a green antiglare coating which is installed to the outside of the building to reduce reflection to acceptable levels.

## Benefits

- Pliable, strong and easy to use
- Ideal for under metal roof and also as a wall wrap
- Provides ongoing physical protection against the elements
- Reduces temperature variations and condensations inside the home
- Increases energy efficiency
- Ideal for coastal areas; and
- Improves homeowner comfort by weatherising the home

## Health & Safety

Information on any known health risks on our products and how to handle them safely is detailed on our website [www.bradfordinsulation.com.au](http://www.bradfordinsulation.com.au). Additional information is listed in the Material Safety Data Sheets also available on our website.

## Standard Sizes & Packaging

Width(mm)	Length(m)	m <sup>2</sup> per roll	Rolls per pallet	Product code
1350	20	27	50	30388
1350	60	81	50	15056

## Durability

Bradford Enviroseal Roof Metal/Wall is a general purpose Roof Sarking/Wall Wrapping product and is guaranteed to be free from manufacturing defects. Bradford Enviroseal Roof Metal/Wall will perform in normal building applications when installed in accordance with AS/NZS 4200.2:1994 Pliable Building Membranes and Underlay's, Part 2 Installation Requirements. Please note, all work must be designed and constructed in compliance with all provisions of the current Building Code of Australia, regulations and relevant standards. Being a secondary sarking /wall wrapping material, Bradford Enviroseal Roof

Metal/Wall is not designed to withstand prolonged direct exposure to the elements. Accordingly, upon application of this product the outer cavity should be installed without delay. Bradford Enviroseal Roof Metal/Wall should be installed with the green anti-glare side facing outwards. In roofing applications, CSR Bradford Insulation recommends using a minimum sag of 40mm deep between the rafters, except at the eaves. To ensure effective performance and satisfactory lifespan, radiant barriers such as Enviroseal must be installed with a minimum airspace of 20mm on the

# ENVIROSEAL™ ROOF METAL/WALL


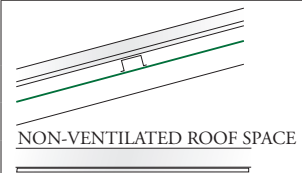
reflective face. For specialised applications such as slate tiles or where specific wind loadings are required please refer to your nearest Bradford Insulation office.

## Physical Properties

Classification in accordance with AS/NZ 4200.1 unless otherwise stated. \*\*When tested to 1530.2, it complies to requirements set out for extreme bush fire attack category BCA clause 3.7.4.3.

## Thermal Performance

The thermal performance of reflective insulation varies according to the direction of the heat flow. The following table provides total R values for common systems in accordance with AS4859.1:2002 Materials for the Thermal Insulation of Buildings.

	<b>Brick Veneer Wall</b>	
	<b>Total R-Value</b>	
	<b>Summer</b>	<b>Winter</b>
	Rt1.6	Rt1.8
	<b>Pitched Metal Roof</b>	
	<b>Total R-Value</b>	
	<b>Summer</b>	<b>Winter</b>
	Rt1.9	Rt1.2

- Emittance of reflective foil surfaces 0.05 or less
- Temperature difference 6°C for heat flow out and 12°C for heat flow in
- In roofs, EnviroSeal installed antiglare facing up, reflective surfaces facing down
- In walls, EnviroSeal installed on the exterior of the studs, reflective surface facing the plasterboard
- Emittance of antiglare surface 0.10

## Classifications

Duty	Table 1 AS/NZS 4200.1:1994	Light
Vapour Barrier	ASTM E96	Medium
Emissivity-Antiglare Side		0.10
Emittance	AS/NZS 4201.5	Reflective
Water Barrier	AS/NZS 4201.4	High
Absorbency	AS/NZS 4201.6	Unclassified
Resistance to Dry De-Lamination	AS/NZ 4201.1	Pass
Resistance to Wet De-Lamination	AS/NZ 4201.2	Pass
Shrinkage	AS/NZ 4201.3	<0.5%
<b>Tensile Strength</b>	AS 1301.448	
Machine Direction(kN/m)		(Min 7.5) 7.9
Lateral Direction(kN/m)		(Min 4.5) 4.9
<b>Edge Tear Resistance</b>	TAPPI T470	
Machine Direction (N)		(Min 45) 53.5
Lateral Direction (N)		(Min 45) 58.7
<b>Folding Endurance</b>	AS 1301.423	
Machine Direction		>2.00
Cross Direction		>1.70
<b>Fire Resistance</b>		
Spread Factor	AS 1530 Part 2	1
Speed Factor	AS 1530 Part 2	0
Heat Factor	AS 1530 Part 2	1
Flammability Index**	AS 1530 Part 2	0

**Bradford™**  
for smarter environments

CSR Bradford Insulation  
55 Stennett Rd, Ingleburn NSW 2565 Australia.

Telephone (02) 9765 7000 Facsimile (02) 9765 7002

[www.bradfordinsulation.com.au](http://www.bradfordinsulation.com.au)

CSR Bradford Insulation is a business division of CSR Building Products Limited ABN 55 008 631 356

The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford Insulation. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the Bradford website for the latest version of this document. The purchaser should independently determine the suitability of the product for the intended use and application.

ENVIROSEAL™ ROOF METAL/WALL – DATA SHEET

**CSR**